DC power surge protector

DDC50-21Y-1200

- DC power Type 2 SPD
- For Energy Storage/EV Charging
- In/Imax: 20/50 kA
- Pluggable modules
- Remote signaling (option)
- prIEC 61643-41 compliance

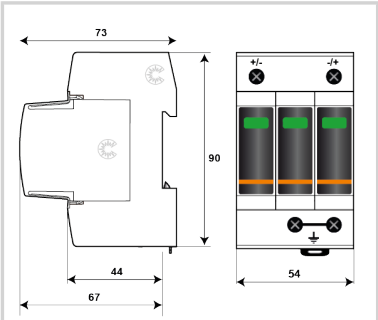

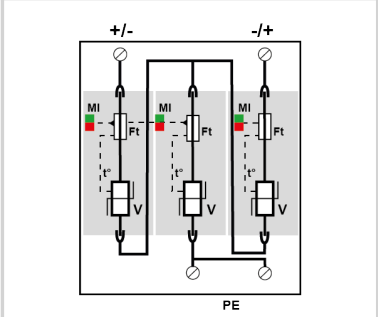

V: High-energy varistor
Ft: Thermal fuse
t°: Thermal disconnection system
MI: Disconnection indicator

Electrical Characteristics		
SPD type	IEC	2
Nominal DC voltage	Un-dc	1000 Vdc
Max. DC operating voltage	Uc	1200 Vdc
Residual Current *Leakage current to Ground*	Ipe	< 0.2 mA
Nominal discharge current *15 x 8/20 µs impulses*	In	20 kA
Max. discharge current *max. withstand @ 8/20 µs by pole*	Imax	50 kA
Impulse current by pole *max. withstand 10/350µs by pole*	Iimp	4 kA
Protection level +/- *@ In (8/20µs)*	Up	3.6 kV
Protection level +/PE (-/PE) *@ In (8/20µs)*	Up	3.6 kV
Admissible short-circuit current	Isccr	100 000 A
Mechanical Characteristics		
Connection to Network		By screw terminals: 2.5-25 mm² (35 mm² rigid)
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from DC network
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Spare module(s)		MDDC50-1200
Remote signaling of disconnection		option DDC50S-21Y-1200: output on changeover contact
Dimensions		See diagram - 3 TE (EN43880)
Weight		0.330 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		Fuse assembly: SFD50S-10-1500DC /or 50 A min. (Isccr 100 kA) - 125 A max. (Isccr 50 kA) - gBat Fuses
Standards		
Standards compliance		prIEC 61443-41 - IEC61643-11
Part number		
828511553		