




# CITEL

## 1-pair DIN rail plug-in Data surge protector

### DLAS1-24D3/R



- 1-pair Pluggable SPD for dataline
- Visual indicator in failsafe behaviour
- Without line cut-off
- Line voltage 24 Vdc
- Din rail mounting, spring contact
- IEC/EN 61643-21 and UL497B compliance

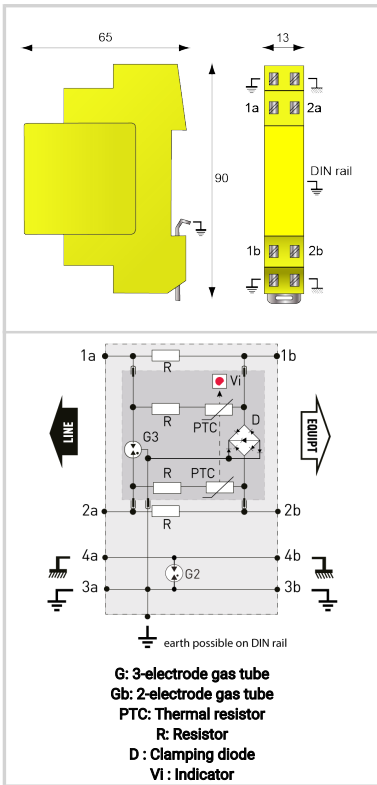

Electrical Characteristics		
Network		4-20mA, Liaison 24V
Max. DC operating voltage	Uc	28 Vdc
Max. frequency	f max.	3 MHz
Max. load current @25°C	IL	300 mA
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	Imax	20 kA
Nominal Discharge Current, X-C (Line/Earth) <i>8/20μs Test x 10 - C2 Category</i>	In L/PE	5 kA
Protection Level <i>C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)</i>	Up	40 V
Protection Level <i>C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)</i>	Up	40 V
Impulse current <i>D1 (10/350μs), 2 applications, X-C (Line/Earth)</i>	limp	5 kA
Line/Line Nominal discharge current <i>C2 Category</i>	In L/L	5 kA
Line resistance (± 10%)		4.7 Ohm
ELEC		
Nominal line voltage	Un	24 V
Mechanical Characteristics		
Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor
SPD configuration		1-pair+shielded
Connection to Network		By spring contact terminal: 0.5-4 mm <sup>2</sup>
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Opening line - transmission cut-off - fault mode 2
Disconnection indicator		Visual indicator is red
Spare module(s)		DLAS1M-24D3
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Certification		SIL
Environmental standards		EU RoHS
Part number		
<b>6415034</b>		

