



DLATS1-12D3

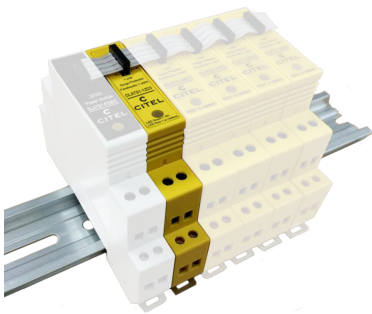

- ✦ 1-pair data line/telecom surge protection
- ✦ Local and Remote signaling of SPD status
- ✦ DIN rail mounting, Screw connect status
- ✦ Plug-in module
- ✦ 1 monitoring module + SPD modules (up to 48) + bus
- ✦ Discharge current I_{max}/I_n : 20 kA / 5kA
- ✦ Complies with IEC/EN 61643-21 and UL497B

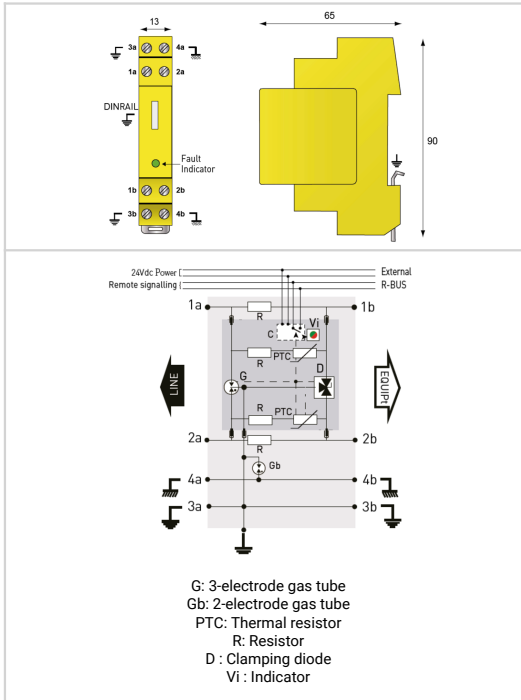

Electrical Characteristics		
Network		RS232, RS485
Nominal line voltage	U_n	12 V
Max. DC operating voltage	U_c	15 Vdc
Max. frequency	f max.	> 3 MHz
Insertion loss		< 1 dB
Max. load current @25°C	I_L	300 mA
Max. discharge current max. withstand @ 8/20 μ s by pole	I_{max}	20 kA
Line inductance ($\pm 10\%$)		non
Protection mode(s)		Common/Differential mode
Protection Level C3 (10/1000 μ s), 300 applications@10 A, X-X (Line/Line)	Up	30 V
Protection level C3 (10/1000 μ s), 300 applications@10 A, X-C (Line/Earth)	Up	30 V
Impulse current 2 x 10/350 μ s Test - D1 Category	I_{imp}	5 kA
Nominal discharge current C2 Category	I_n	5 kA
Line/Line Nominal discharge current C2 Category	I_n L/L	5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20 μ s Test x 10 - C2 Category	I_n L/PE	5 kA
Line resistance ($\pm 10\%$)		4.7 Ohm
Mechanical Characteristics		
Technology		GDT+Clamping diode+PTC (thermal resistor) + Resistor
SPD configuration		1-pair+shielded
Connection to Network		By screw terminal: cross section 0.5-2.5mm ²
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T_u	-40/+85°C
Protection rating		IP20
Failsafe mode		Transmission cut-off - fault mode 2 (short circuit)
Disconnection indicator		Red light on
Spare module(s)		DLATS1M-12D3
Remote signaling of disconnection		Trough control module
Remote signaling of disconnection via control module		Yes
Dimensions		See diagram
Weight		0.067 kg
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Part number		
6417021		