




CITEL

2-pair DIN rail plug-in Data surge protector

DLA2-24D2



- Din rail plug-in surge protector
- 2-pair
- Un: 24 V
- Shield wire protection
- Without line cut-off
- IEC 61643-21 compliance

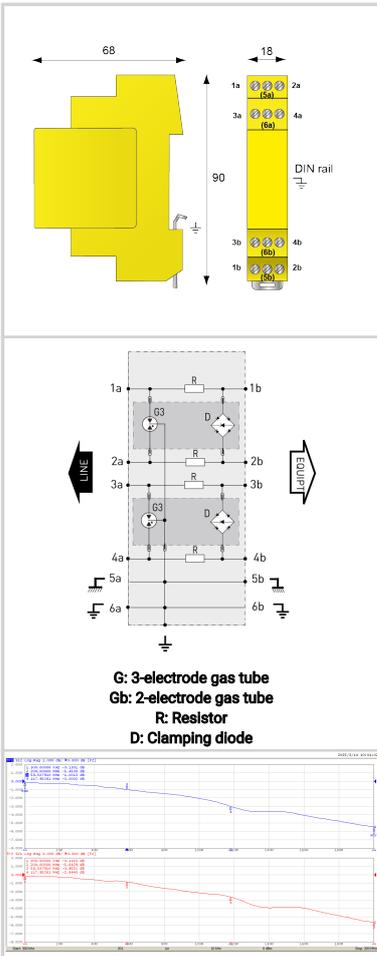

Electrical Characteristics

Network		4-20mA, Liaison 24V
Nominal line voltage	Un	24 V
Max. DC operating voltage	Uc	32 Vdc
Cut-off frequency -3dB, 100 ohm system	f max.	> 115 MHz
Cut-off frequency -1dB, 100 ohm system	f max.	> 50 MHz
Max. load current @25°C	IL	600 mA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax	20 kA
Nominal discharge current C2 Category	In	10 kA
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	Up	60 V
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)	Up	650 V
Impulse current D1 (10/350μs), 2 applications, X-C (Line/Earth)	Iimp	5 kA
Line resistance (± 10%)		2 Ohm

Mechanical Characteristics

Technology	GDT+TVS diode
SPD configuration	2 pairs
Connection to Network	By screw terminal: cross section 0.5-2.5mm²
Format	Plug-in DIN box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating and storage temperature	-40/+85°C
Protection rating	IP20
Failsafe mode	Short-circuit
Disconnection indicator	Transmission interrupt - default mode 2
Spare module(s)	DLA2M-24D2
Dimensions	See diagram
Weight	0.089 kg

Standards

Standards compliance	IEC 61643-21 / EN 61643-21
----------------------	----------------------------

Part number

Part number	6403631
-------------	---------

