



DDT16

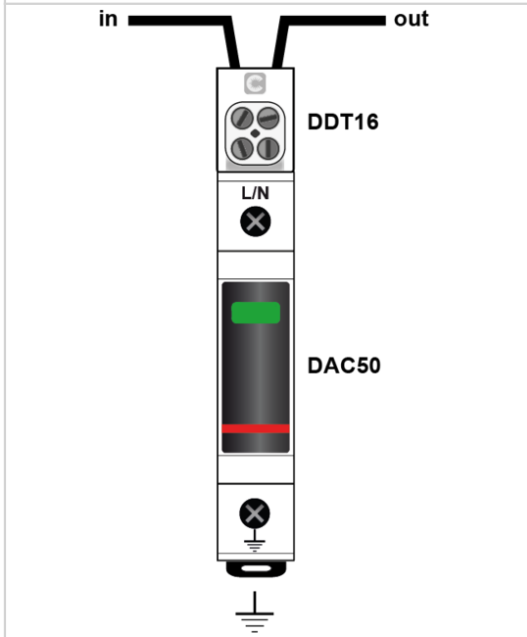

- ✦ 'V' connection screw terminal for SPD
- ✦ Improved connection for better efficiency
- ✦ 2 x 35 mm² wire connection
- ✦ Adapted to DAC/DDC surge protectors

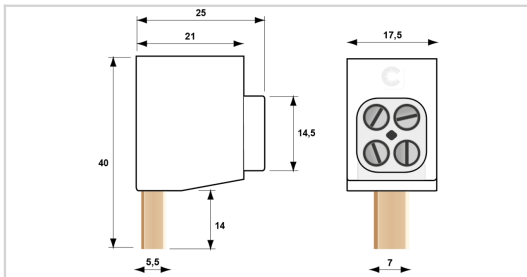

Electrical Characteristics		
Max. load current @25°C	IL	100 A
Mechanical Characteristics		
Mounting		On DAC/DDC range terminal
Housing material		Polycarbonate UL94 V-0
Dimensions		See diagram
Contacts		Brass
Mini-max. cross section		2.5 - 35 mm ² (13-2 AWG)
Weight		0.042 kg
Standards		
Standards compliance		UL1059
Part number		
400132		