


## DLAW-170



- ✔ Din rail plug-in surge protector
- ✔ 1-pair
- ✔ Uc : 170 V
- ✔ Shield wire protection
- ✔ Plug-out with line cut-off
- ✔ EN 61643-21 compliance

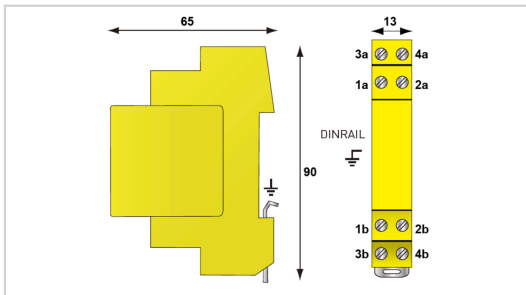

Electrical Characteristics		
Network		RTC, ADSL2, VDSL2
Nominal line voltage	Un	150 V
Max. DC operating voltage	Uc	170 Vdc
Max. frequency	f max.	> 10 MHz
Insertion loss		< 1 dB
Max. load current @25°C	IL	300 mA
Max. discharge current max. withstand @ 8/20 µs by pole	Imax	20 kA
Line inductance (± 10 %)		non
Protection Level C3 (10/1000µs), 300 applications@10 A, X-X (Line/Line)	Up	220 V
Protection level C3 (10/1000µs), 300 applications@10 A, X-C (Line/Earth)	Up	20 V
Impulse current 2 x 10/350µs Test - D1 Category	Iimp	5 kA
Line/Line Nominal discharge current C2 Category	In L/L	5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	In L/PE	5 kA
Line resistance (± 10%)		4.7 Ohm
Mechanical Characteristics		
Disconnection		Specific version with line cut-off in case of removal plug-in module
Technology		GDT+TVS diode
SPD configuration		1-pair+shielded
Connection to Network		By screw terminal: cross section 0.5-2.5mm <sup>2</sup>
Format		Plug-in DIN box
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit
With line cut-off in case of removal plug-in module		Yes
Disconnection indicator		Transmission interrupt - default mode 2
Spare module(s)		DLAM-170
Dimensions		See diagram
Standards		
Standards compliance		IEC 61643-21 / EN 61643-21 / UL497B
Part number		
640805		