




Type 2 AC surge protector - 3-phase+N

CITEL

DAC50-40-530



- ▶ Type 2 AC surge protector
- ▶ In: 20 kA
- ▶ Imax: 50 kA
- ▶ Pluggable module for each phase
- ▶ Remote signaling option
- ▶ EN 61643-11, IEC 61643-11 and UL1449 ed.5 certified

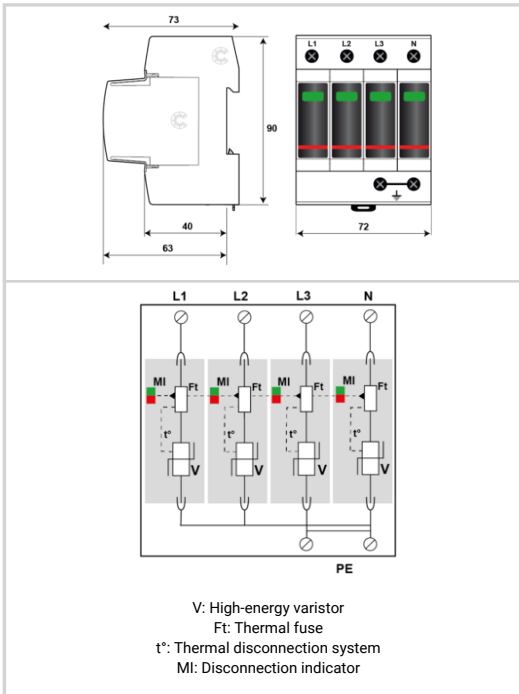

Electrical Characteristics	
SPD type	2
Network	480/830 V 3-phase+N
AC system	TNS
Max. AC operating voltage	Uc 530 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 700 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 920 Vac disconnection
Residual Current Leakage current to Ground	Ipe < 1 mA
Follow current	If None
Nominal discharge current 15 x 8/20 μs impulses	In 20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax 50 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	Imax Total 200 kA
Protection mode(s)	L/PE and N/PE
Protection level N/PE @ In (8/20μs)	Up N/PE 2.4 kV
Protection level L/PE @ In (8/20μs)	Up L/PE 2.4 kV
Protection level N/PE at 5 kA @ 5 kA (8/20μs)	Up-5kA 2 kV
Residual voltage L/PE at 5 kA @ 5 kA (8/20μs)	Up-5kA 2 kV
Admissible short-circuit current	Isc cr 50 000 A
Mechanical Characteristics	
Technology	MOV
SPD configuration	3-phase+Neutral
Connection to Network	By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole - Red/Green
Spare module(s)	MDAC50-530
Remote signaling of disconnection	option DAC50S-40-530 : output on changeover contact
Dimensions	See diagram - 4TE (EN43880)
Weight	0.446 kg
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	50 A min. - 125 A max. - Fuses Type gG
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	ÖVE / UL
Part number	
821110514	

