




Type 1+2 AC surge protector single-phase

CITEL

DAC1-13-11-150



- ↳ Type 1 + 2 AC multipolar surge protector
- ↳ In : 20 kA
- ↳ Iimp: 12.5 kA
- ↳ Pluggable module for each phase
- ↳ Remote signaling (option)
- ↳ EN 61643-11, IEC 61643-11 compliance

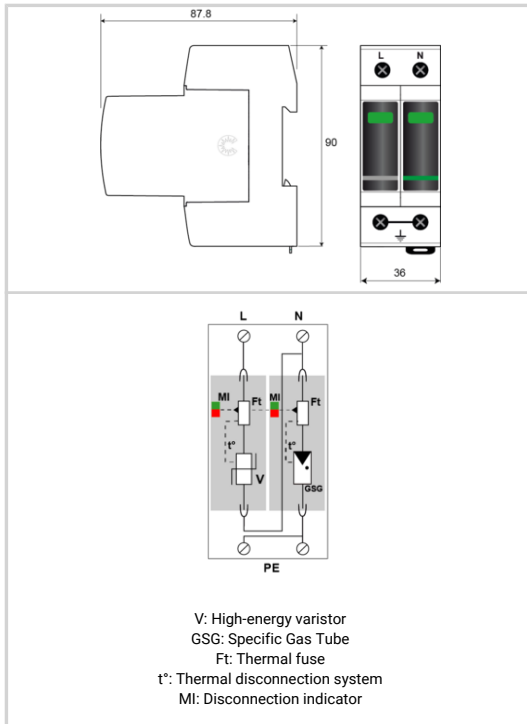

Electrical Characteristics	
SPD type	1+2
Network	120 V single-phase
AC system	TT-TN
Max. AC operating voltage	Uc 150 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 230 Vac disconnection
Temporary Over Voltage N/PE (TOV HT) Without disconnection or with safety disconnection	UT 1200 V/300A/200 ms withstand
Residual Current Leakage current to Ground	Ipe None
Follow current	If None
Nominal discharge current 15 x 8/20 μs impulses	In 20 kA
Max. discharge current max. withstand @ 8/20 μs by pole	Imax 50 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	Imax Total 100 kA
Impulse current by pole max. withstand 10/350μs by pole	Iimp 12.5 kA
Total lightning current max. total withstand @ 10/350μs	Itotal 25 kA
Specific energy by pole max. withstand 10/350 μs	W/R 40 kJ/ohm
Protection mode(s)	L/N and N/PE
Protection level @ In (8/20μs) and @ 6 kV (1,2/50 μs)	Up L/N 0.9 kV
Protection level N/PE @ In (8/20μs) and @ 6 kV (1,2/50 μs)	Up N/PE 1.5 kV
Residual voltage L/N at 5 kA @ 5 kA (8/20μs)	Up-5kA 0.6 kV
Protection level N/PE at 5 kA @ 5 kA (8/20μs)	Up-5kA 0.6 kV
Admissible short-circuit current	Iscrr 50 000 A
Mechanical Characteristics	
Technology	VG Technology (MOV+GSG)
SPD configuration	Single phase
Connection to Network	By screw terminals: 2.5-25mm ² (35mm ² rigid)
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection from AC network
Disconnection indicator	1 mechanical indicator by pole - Red/Green
Spare module(s)	MDAC1-13-150 + MDAC1-25G-xxx
Remote signaling of disconnection	option DAC1-13S-11-150: output on changeover contact
Dimensions	See diagram - 2TE (EN43880)
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Back-up protection device	315 A max. - Fuses Type gG / or SFD1-13S
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Certification	KEMA
Part number	
821710132	

