




DC power surge protector

CITEL

DDC50-21Y-500



- DC power Type 2 SPD
- For Energy Storage/EV Charging
- In/Imax: 20/50 kA
- Pluggable modules
- Remote signaling (option)
- prIEC 61643-41 compliance

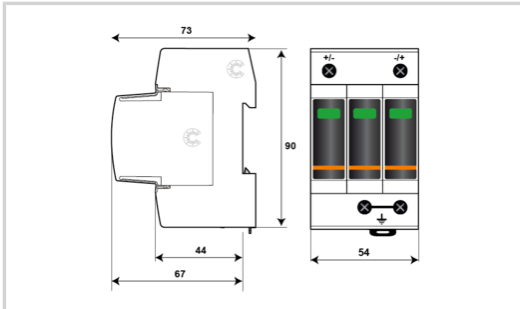

Electrical Characteristics		
SPD type	IEC	2
Nominal DC voltage	Un-dc	450 Vdc
Max. DC operating voltage	Uc	500 Vdc
Residual Current	Ipe	< 0.1 mA
Leakage current to Ground		
Nominal discharge current	In	20 kA
15 x 8/20 μ s impulses		
Max. discharge current	Imax	50 kA
max. withstand @ 8/20 μ s by pole		
Impulse current by pole	Iimp	4 kA
max. withstand 10/350 μ s by pole		
Protection level +/-	Up	2.1 kV
@ In (8/20 μ s)		
Protection level +/-PE (-/PE)	Up	2.1 kV
@ In (8/20 μ s)		
Admissible short-circuit current	Iscrr	100 000 A
Mechanical Characteristics		
Connection to Network		By screw terminals: 2.5-25 mm ² (35 mm ² rigid)
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from DC network
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Spare module(s)		MDDC50-500
Remote signaling of disconnection		option DDC50S-21Y-500: output on changeover contact
Dimensions		See diagram - 3 TE (EN43880)
Weight		0.292 kg
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		Fuse assembly: SFD50S-10-1500DC /or 50 A min. (Iscrr 100 kA) - 125 A max. (Iscrr 50 kA) - gBat Fuses
Standards		
Standards compliance		prIEC 61443-41 - IEC61643-11
Part number		
828511253		

