




DC power surge protector

CITEL

DDC50S-21Y-500



- DC power Type 2 SPD
- For Energy Storage/EV Charging
- In/Imax: 20/50 kA
- Pluggable modules
- Remote signaling
- prIEC 61643-41 compliance

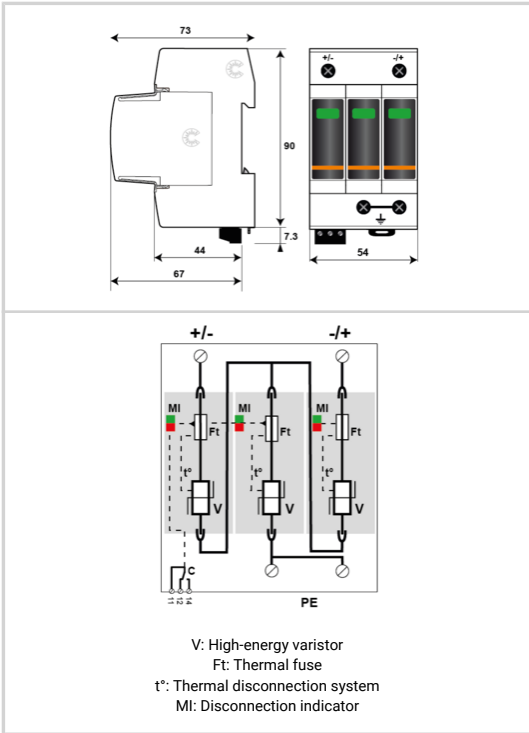

Electrical Characteristics		
SPD type		2
Nominal DC voltage	Un-dc	450 Vdc
Max. DC operating voltage	Uc	500 Vdc
Residual Current		
Leakage current to Ground	I _{pe}	< 0.1 mA
Nominal discharge current		
15 x 8/20 μs impulses	I _n	20 kA
Max. discharge current		
max. withstand @ 8/20 μs by pole	I _{max}	50 kA
Impulse current by pole		
max. withstand 10/350μs by pole	I _{imp}	4 kA
Protection level +/- @ In (8/20μs)	U _p	2.1 kV
Admissible short-circuit current	I _{sc cr}	100 000 A
Mechanical Characteristics		
Connection to Network		By screw terminals: 2.5-25 mm ² (35 mm ² rigid)
Mounting		Symmetrical rail 35 mm (EN 60715)
Housing material		Thermoplastic UL94 V-0
Operating temperature	T _u	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from DC network
Disconnection indicator		1 mechanical indicator by pole - Red/Green
Spare module(s)		MDDC50-500
Remote signaling of disconnection		output on changeover contact
Wiring for remote signaling		1.5 mm ² max.
Max. Voltage/Current for remote signaling		250 V / 0.5 A (AC) / 30 V / 3 A (DC)
Dimensions		See diagram - 3 TE (EN43880)
APPLICATION		ENERGY STORAGAGE SYSTEMS (ESS) /EV CHARGING
Disconnectors		
Thermal disconnector		Internal
Back-up protection device		50 A min. (I _{sc cr} 100 kA) - 125 A max. (I _{sc cr} 50 kA) - gBat Fuses
Standards		
Standards compliance		prIEC 61443-41 - IEC61643-11
Part number		
		828511263

