




Type 2 (or 3) AC surge protector - 3-phase

CITEL

DAC15C-30-150



- ▶ Compact 3-phase Type 2 (or 3) surge protector
- ▶ In: 5 kA
- ▶ I_{max}: 15 kA
- ▶ Common mode
- ▶ Pluggable module
- ▶ Remote signaling (option)
- ▶ EN 61643-11, IEC 61643-11 and UL1449 ed.5 compliance

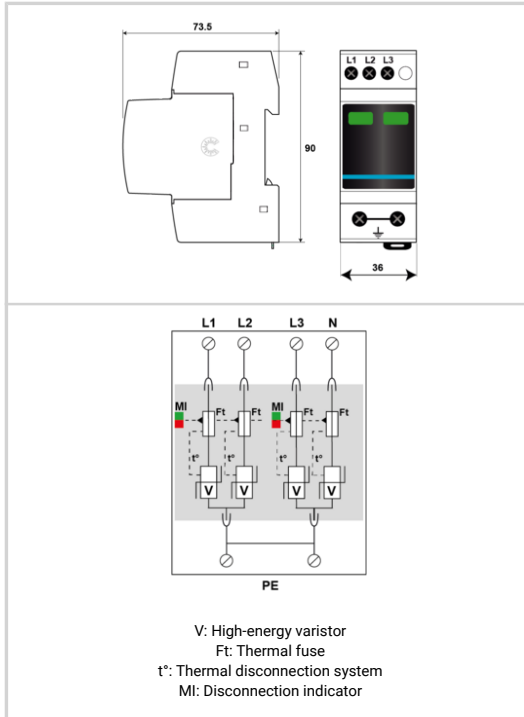

Electrical Characteristics			
SPD type	IEC		2 (or 3)
Network			120/208 V
AC system			TN
Max. AC operating voltage	U _c		150 Vac
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT		180 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT		230 Vac disconnection
Residual Current Leakage current to Ground	I _{pe}		< 1 mA
Follow current	I _f		None
Nominal discharge current 15 x 8/20 μs impulses	I _n		5 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}		15 kA
Total Maximum discharge current max. total withstand @ 8/20 μs	I _{max} Total		60 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50μs - 8/20μs	U _{oc}		10 kV
Protection mode(s)			L/PE
Protection level L/PE @ I _n (8/20μs)	U _p L/PE	0.6 kV	
Admissible short-circuit current	I _{sccr}		10 000 A
Mechanical Characteristics			
Technology			MOV
SPD configuration			3-phase
Connection to Network			By screw terminals: L/N = 1.5-10mm ² (16mm ² rigid) or PE = 2.5-25mm ² (35mm ² rigid)
Format			Plug-in modular box
Mounting			Symmetrical rail 35 mm (EN 60715)
Housing material			Thermoplastic UL94 V-0
Operating temperature	T _u		-40/+85°C
Protection rating			IP20
Failsafe mode			Disconnection from AC network
Disconnection indicator			2 mechanical indicators - Red/Green
Spare module(s)			MDAC15C-30-150
Remote signaling of disconnection			Option DAC15CS-30-150 : output on changeover contact
Dimensions			See diagram - 2TE (EN43880)
Weight			0.209 kg
Disconnectors			
Thermal disconnector			Internal
Installation ground fault breaker			Type 'S' or delayed
Back-up protection device			20 A min. - 125 A max. - Fuses type gG
Standards			
Standards compliance			IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Part number			
821610113			

